


BAC 160



Features	BAC 160
Outer dimensions in mm	800 x 600 x 1050 height
Inner dimensions in mm	580 x 370 x 700 height
Volume	150 litres
K value	0,30 W/m ² .K
Weight	60 Kg
Insulation material	Expanded polyurethane foam
Material of the walls	Rotomoulded polyethylene

Specifications and optional equipment

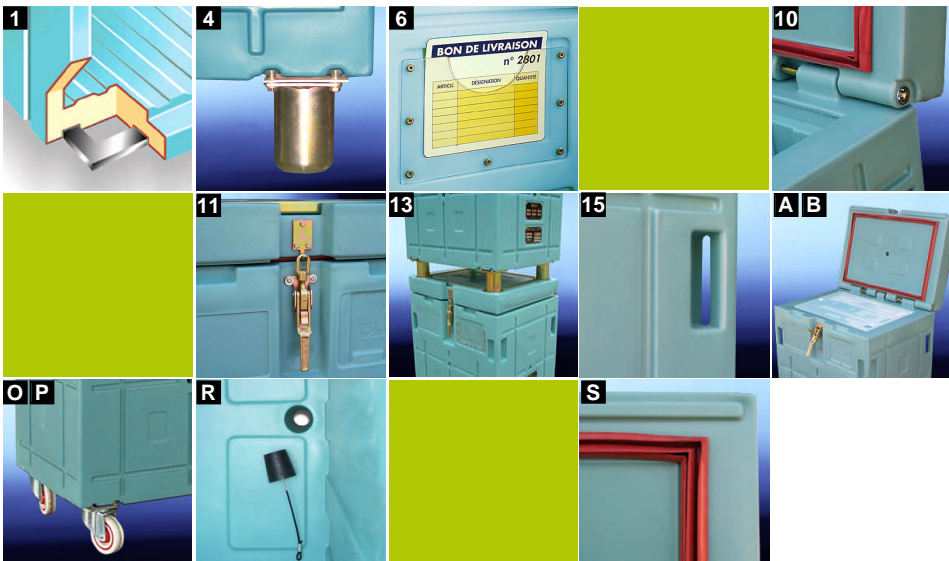

Technical features

- 1 Body and door made of one piece rotomoulded polyethylene. Insulation with CFC free expanded polyurethane foam.
- 4 Rustproof treated steel frame, flush mounted, fitted with 4 metal feet ø 80 mm.
- 6 Label holder
- 10 Hinging from moulding and 105° lid opening.
- 11 Flush mounted and recessed fastener
- 13 Stackable Bac 160 on metal feet and lid fitted with stacking locations.
- 15 Integrally moulded handles

Standard equipment

- B Eutectic plate support
- R Drain plug
- S One-piece silicone seal

Optional equipment

- A Eutectic plate TOP 370
- O Castor base fitted with 2 fixed and 2 swivelling wheels ø 125 mm
- P Castor base fitted with 2 fixed and 2 swivelling wheels ø 125 mm with brake

kwaliteit koelt klasse!

ColdVink

Tel. +31 184 642101 * www.coldvink.nl